


LT023PS

Features

- Compact (diameter: 5.6mm)
- Low noise S/N: -80 dB (according to measurement method Fig 27-2)
- Wavelength: 780nm
- Single transverse mode
- Multi longitudinal mode

Applications

- Video disc players
- Fiber optic communications
- Light source for analog processing
- Measurement instruments
- Analysis instruments

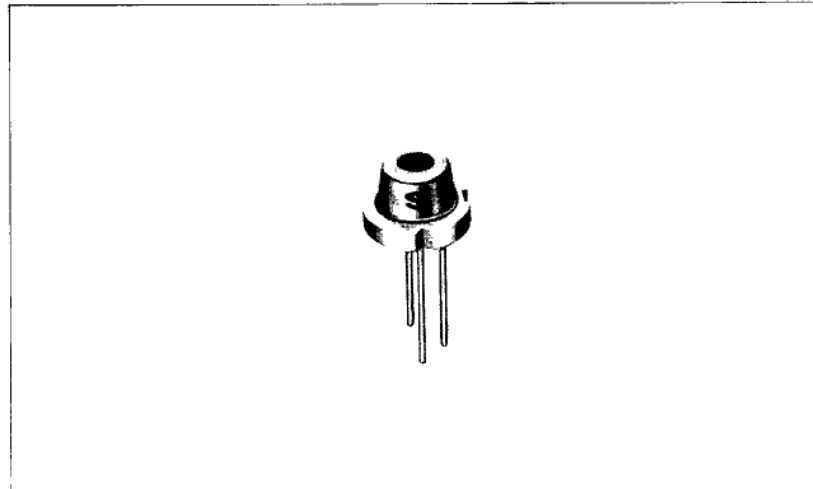

Absolute Maximum Ratings

(Tc = 25°C)

Parameter	Symbol	Ratings	Units
Optical power output	Po	5	mW
Reverse voltage	Laser PIN VR	2	V
		30	
Operating temperature*1	Topr	-10 to +70	°C
Storage temperature*1	Tstg	-40 to +85	°C

*1 Case temperature

Electro-optical Characteristics*1

(Tc = 25°C)

Parameter	Symbol	Condition	Ratings			Units		
			MIN	TYP	MAX			
Threshold current	Ith	---	---	45	60	mA		
Operating current	Iop	Po = 3mW	---	55	75	mA		
Operating voltage	Vop	Po = 3mW	---	1.75	2.0	V		
Wavelength*2	λp	Po = 3mW	770	780	795	nm		
Monitor current	I _m	Po = 3mW VR = 15V	0.08	0.20	0.42	mA		
Radiation characteristics	Angle*3	Parallel to junction	θ	Po = 3mW	8.5	11	16	deg
		Perpendicular to junction	θ _⊥	Po = 3mW	29	38	48	deg
	Ripple	Po = 3mW	---	---	±20	%		
Emission point accuracy	Angle	Δφ	Po = 3mW	---	---	±2	deg	
		Δφ _⊥	Po = 3mW	---	---	±3	deg	
	Position	Δx, Δy, Δz	---	---	---	±80	μm	
Differential efficiency	η	2mW I _F (3mW) - I _F (1mW)	0.1	0.3	0.5	mW/mA		
Coherence	γ	Po = 3mW	---	---	0.47			

*1 Initial value

*3 Angle at 50% peak intensity (full width at half-maximum)

*2 Single transverse mode

Electrical Characteristics of Photodiode

(Tc = 25°C)

Parameter	Symbol	Condition	Ratings			Units
			MIN	TYP	MAX	
Sensitivity	S	VR = 15V	---	0.07	---	mA/mW
Dark current	ID	VR = 15V	---	---	150	nA
Terminal capacitance	Ct	VR = 15V	---	9	---	pF

Common Data

Fig. 94-1 Optical Power Output Dependence of Far-Field Pattern

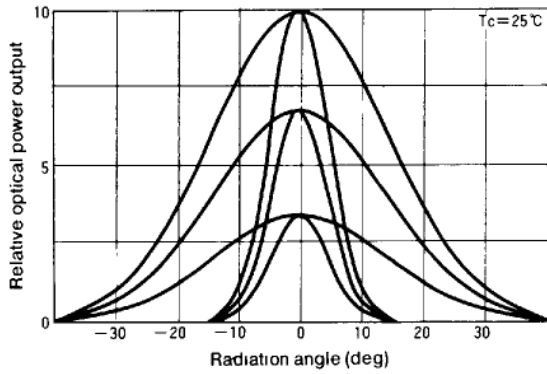


Fig. 94-4 Coupling Efficiency

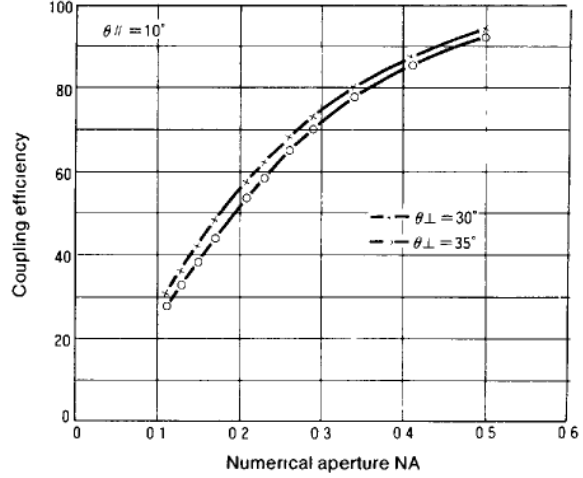


Fig. 94-2 Polarization Ratio vs. Optical Power Output (LT026 series, LT023 series)

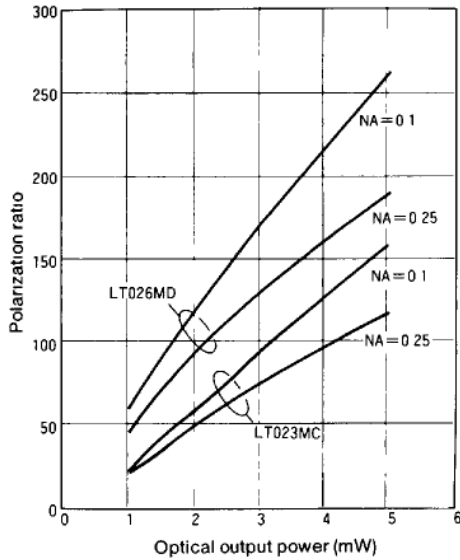


Fig. 94-5 Frequency Response


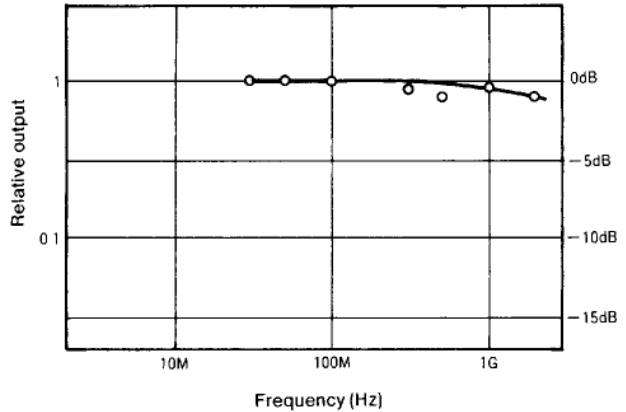


Fig. 94-3 Polarization Ratio vs. Optical Power Output (LT024 series, LT015 series)

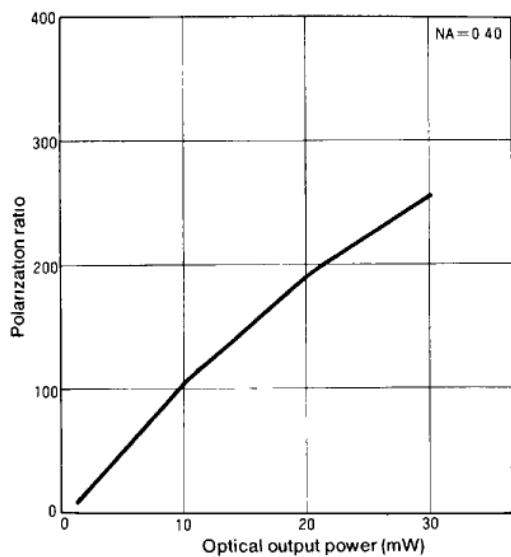

Note All data on this page is typical only, and is not intended as a specification. The shapes of these curves can be used as a general reference, but the actual characteristics will vary from device to device.

Built-in PIN Photodiode Characteristics

Fig. 95-1 Photodiode Frequency Response Characteristic


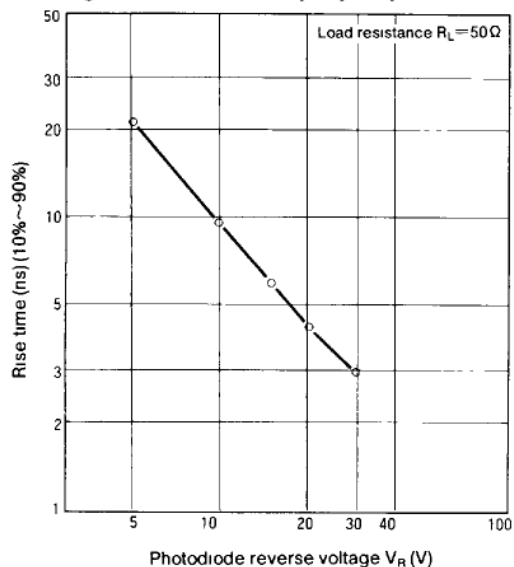


Fig. 95-2 Photodiode Temperature Characteristic

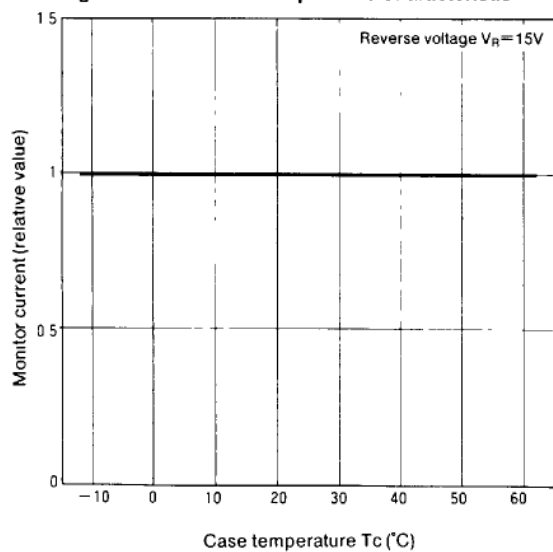

Note All data on this page is typical only, and is not intended as a specification. The shapes of these curves can be used as a general reference, but the actual characteristics will vary from device to device.

Outline Dimensions

Unit: mm

Fig. 98-1 Standard Type (C Type)

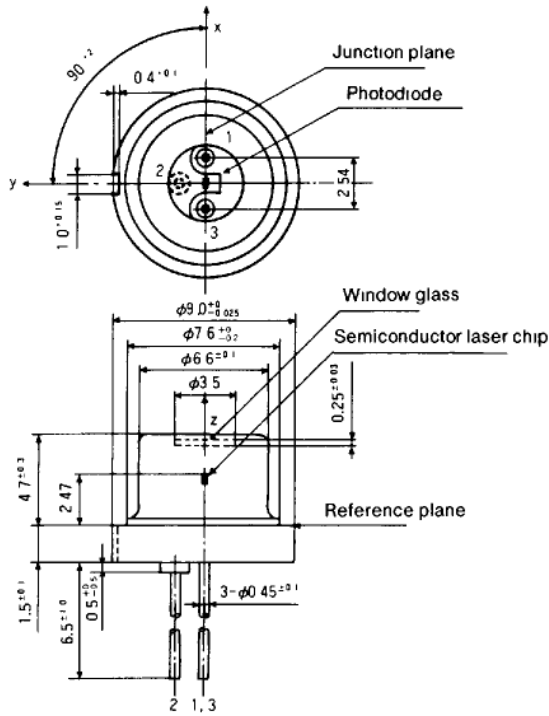


Fig. 98-2 Low-Cap Type (D Type)

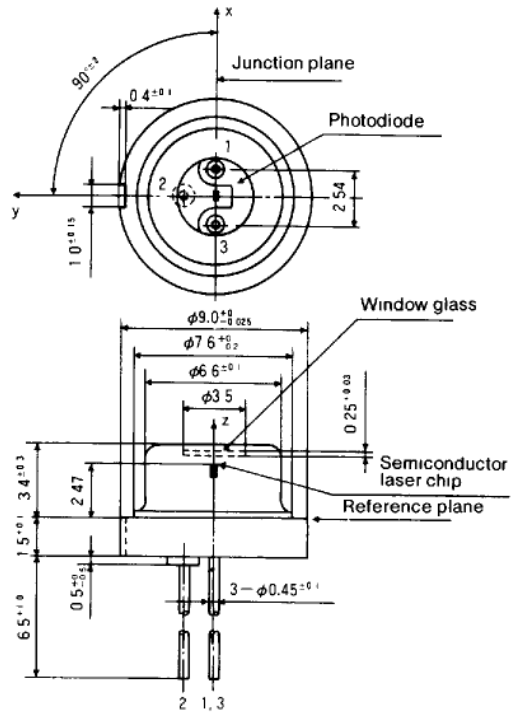


Fig. 98-3 Fin-Equipped Type (F Type)


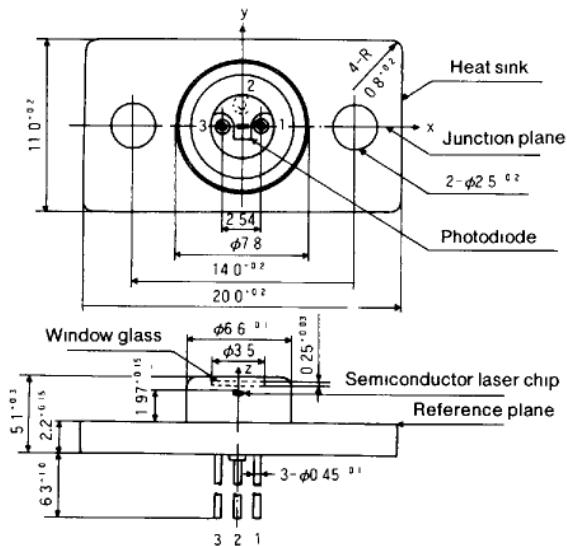


Fig. 98-4 Compact Package Type (S Type)



フォトダイオードの極性が逆になっている
*アノードがコモン (ピン2そしてケースと接続されている)

Terminal connections

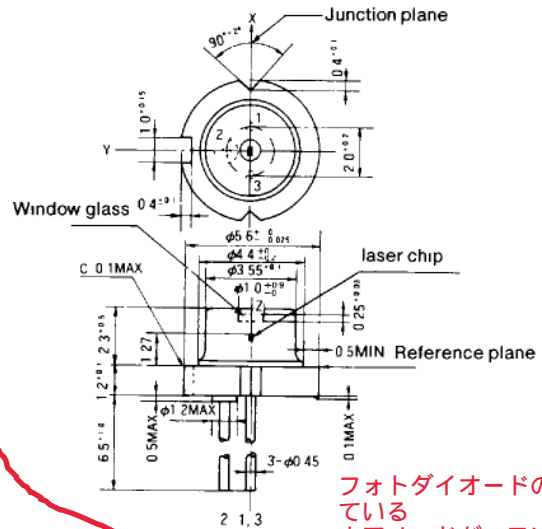